

# DYNAMIC ARM BARRIER




Dynamic Arm Barrier gathers practical control system, functionality and a lot of advantages through its newest structure.

It provides effective controlling of car parks through avoiding misusing.

Also there is a Led system lighting green while barrier is inactive and red while barrier is active and it is opened automatically when sunset.



## Product Details

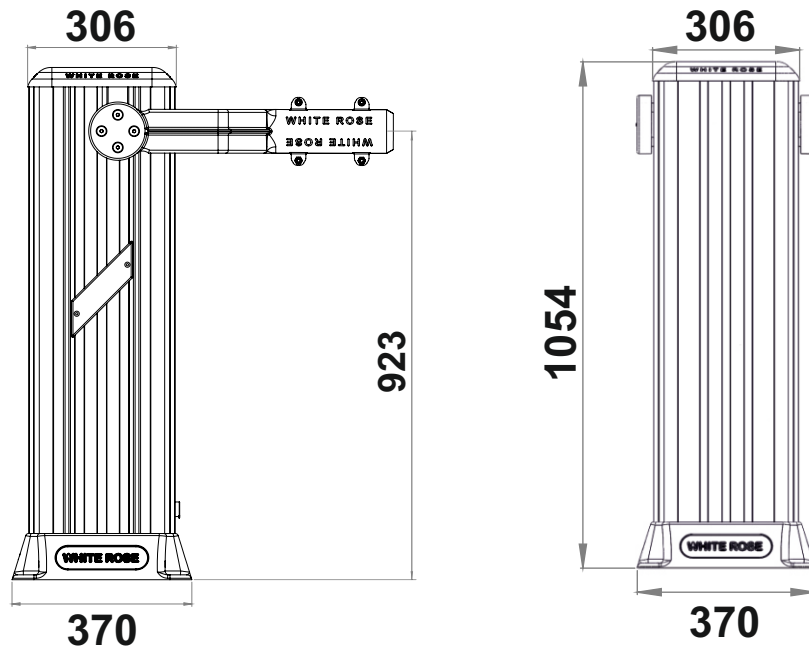

## Technical Datasheet

Type	DN 3SR DC	DN 4 DC	DN 6 DC
Maximum Boom Length	2mt	4mt	5,8mt
Protection Class	IP54		
Power Supply	230 V 50/60 Hz		
Motor Voltage	24 V		
Control Card	H-TECH 70		
Average Current	2 A		
Maximum power	120 W		
Opening Time	1,5 sec	4,5 sec	
Maximum Torque	95 Nm	286 Nm	
Duty Cycle	100%		
Limit Switch Type	Electromechanical		
Impact reaction	Current Control Adjusting		
Slow Down	Available		
Manual Usage	Switch on Reductor		
Working Temperature	-20°C min +70°C max		
Barrier Weight	42 Kg	42 Kg	42 Kg