

Parva 8 “

DOWNLIGHT



Areas of application

- Compatible with standard suspended ceilings
- Replacement for downlight applications with compact fluorescent lamps
- Corridors
- Foyers
- Lobbies
- Shops
- Offices

Product benefits

- Efficient energy saving
- Elegant design
- Easy installation system
- Shallow mounting depth

Product specifications

- Lifetime (L70/B50) : up to 50,000 h
- Color temperature : 2,700 K - 6,500 K
- Operating voltage : 220...240 V AC supply
- Type of protection : IP20
- Recessed ceiling mounting
- Led type : Epistar
- Driver : Eaglerise



IP 20



Product datasheet

Technical data


Electrical data

Nominal wattage	18 W
Nominal voltage	220 - 240 V
Power factor	>0.9
Lumen / Watt	67 lm/watt
Total harmonic distortion	>%20
Mains frequency	50..60 Hz

Photometrical data

Color temperature	2700 K - 6500 K
Luminous flux	1200 lm
Color rendering index Ra	>80

Dimensions

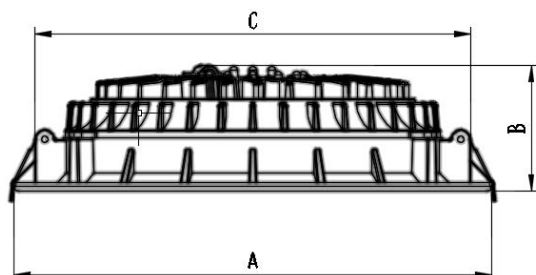

A	217 mm
B	57 mm
C	198 mm

Colors & materials

Body material	Aluminum die cast
Product color	Electrostatic powder paint

Note : Product body paint can be ordered with other RAL codes.



Temperatures & operating conditions

Ambient temperature range	-25 ... +85 °C
---------------------------	----------------

Product datasheet

Light Technical Data

Beam angle	Wide distribution
-------------------	-------------------

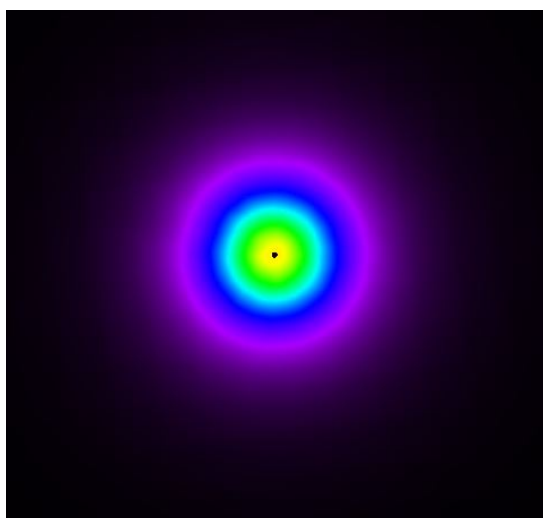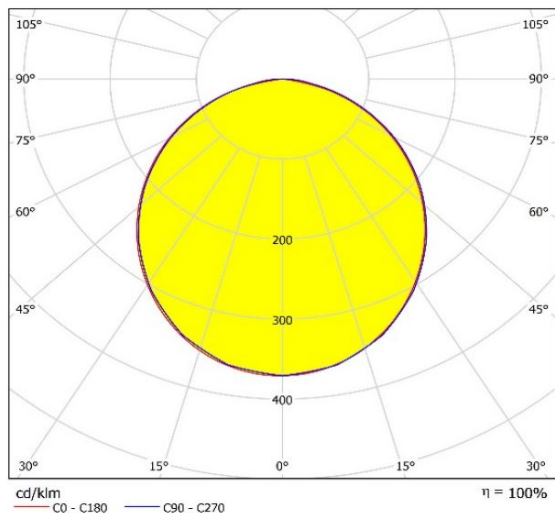

Type of cover	Opal arcyclic diffuser
----------------------	------------------------

Capabilities

Type of installation	Recessed
Type of connection	Cable, 2x 0.50mm ²

Certificates & standards

Protection class	Insulation class I (safety insulation)
Type of protection	IP20