


ALBINO

LINEER

Areas of application

- Shopping Centers
- Stores
- Meeting Halls
- Aisles
- Schools
- Shops
- Offices

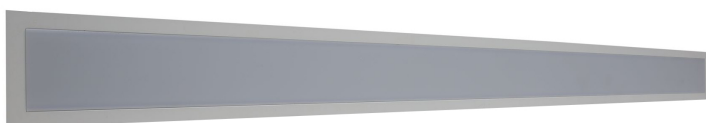

Product benefits

- Efficient energy saving
- Elegant design
- Easy installation system
- Shallow mounting depth

Product Specifications

- Lifetime (L70/B50) : up to 50,000 h
- Color temperature : 2,700 K - 6,500 K
- Operating voltage : 220...240 V AC supply
- Type of protection : IP20
- Recessed ceiling mounting
- Led type : Epistar
- Driver : Eaglerise



IP 20



Product datasheet

Technical data


Electrical data

Nominal wattage	40 W
Nominal voltage	220 - 240 V
Power factor	> 0.9
Lumen / Watt	80 lm/watt
Total harmonic distortion	< %20
Mains frequency	50...60 Hz

Photometrical data

Color temperature	2700 K - 6500 K
Luminous flux	3183 lm
Color rendering index Ra	>80

Dimensions

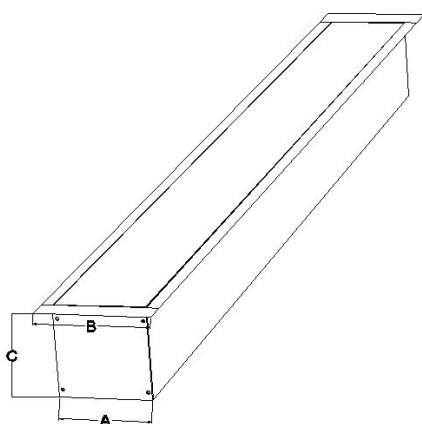

A	65 mm
B	89 mm
C	59mm

Colors & materials

Body material	Aluminum extrusion
Product color	Electrostatic powder paint

Note : Product body paint can be ordered with other RAL codes.



Temperatures & operating conditions

Ambient temperature range	-25 ... +85 °C
---------------------------	----------------

Product datasheet

Light Technical Data

Beam angle	Wide distribution
-------------------	-------------------

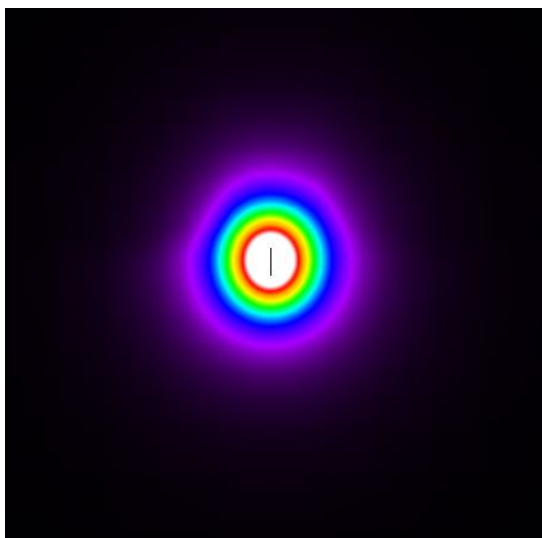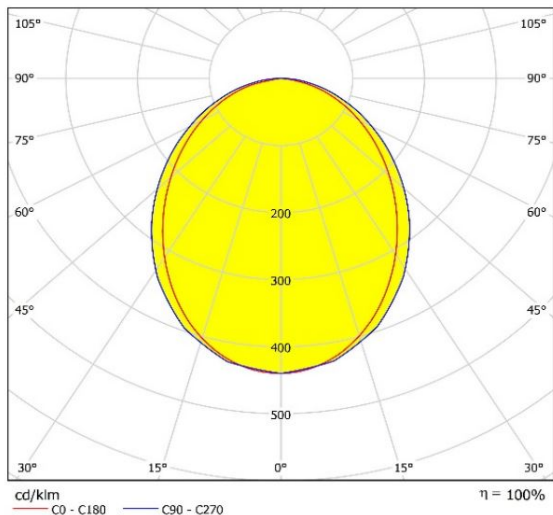

Type of cover	PC
----------------------	----

Capabilities

Type of installation	Recessed
Type of connection	Cable, 2 x 0.50mm ²

Certificates & standards

Protection class	Insulation class I (safety insulation)
Type of protection	IP20