

UFOBIEN STREET LIGHT



Areas of application

- Collection Roads
- Main Roads
- Logistic Areas
- Urban Areas
- Parks
- Open Carparks
- Airports

Product benefits

- Efficient energy saving
- Elegant design
- Easy installation system

Product specifications

- Lifetime (L70/B50) : up to 50,000 h
- Color temperature : 2,700 K - 6,500 K
- Operating voltage : 220...240 V AC supply
- Type of protection : IP66
- Surfaced mounting
- Led type : Samsung - Seoul
- Driver : Meanwell



IP 66



Product datasheet

Technical data


Electrical data

Nominal wattage	85 W
Nominal voltage	220 - 240 V
Power factor	> 0.95
Lumen / Watt	124 lm/watt
Total harmonic distortion	< %20
Mains frequency	50...60 Hz

Photometrical data

Color temperature	2700 K - 6500 K
Luminous flux	10535 lm
Color rendering index Ra	> 80

Dimensions

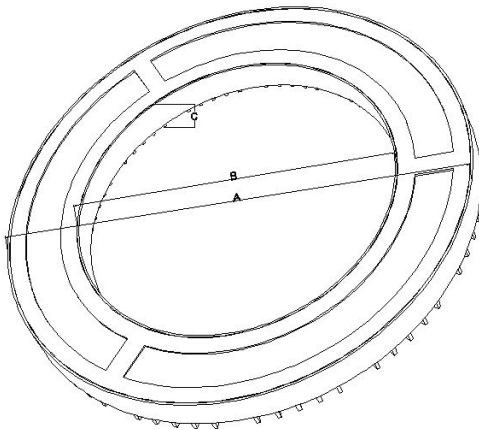

A	600 mm
B	400 mm
C	55 mm

Colors & materials

Body material	Aluminum die cast
Product color	Electrostatic powder paint



Note : Product body paint can be ordered with other RAL codes.

Temperatures & operating conditions

Ambient temperature range	-25 ... +85 °C
---------------------------	----------------

Light Technical Data

Beam angle	Wide distribution
-------------------	-------------------

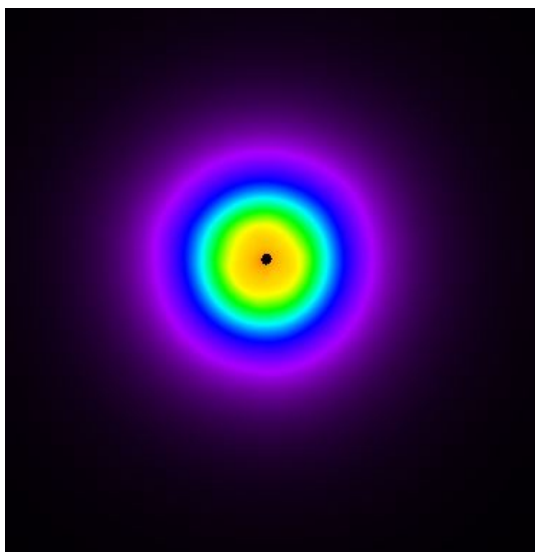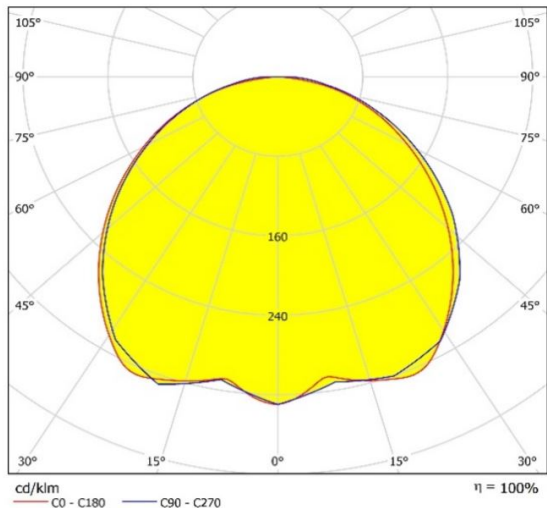

Type of cover	PC
----------------------	----

Capabilities

Type of installation	With lighting pole
Type of connection	Cable, 3 x 1.50 mm ²

Certificates & standards

Protection class	Insulation class I (safety insulation)
Type of protection	IP66