

## Selam 6 “

### DOWNLIGHT



#### Areas of application

- Compatible with standard suspended ceilings
- Replacement for downlight applications with compact fluorescent lamps
- Corridors
- Foyers
- Lobbies
- Shops
- Offices

#### Product benefits

- Efficient energy saving
- Elegant design
- Easy installation system
- Shallow mounting depth

#### Product specifications

- Lifetime (L70/B50) : up to 50,000 h
- Color temperature : 2,700 K - 6,500 K
- Operating voltage : 220...240 V AC supply
- Type of protection : IP20
- Recessed ceiling mounting
- Led type : Samsung - Seoul
- Driver : Eaglerise



IP 20



# Product datasheet

## Technical data


### Electrical data

Nominal wattage	18 W
Nominal voltage	220 - 240 V
Power factor	>0.9
Lumen / Watt	105 lm/watt
Total harmonic distortion	>%20
Mains frequency	50..60 Hz

### Photometrical data

Color temperature	2700 K - 6500 K
Luminous flux	1890 lm
Color rendering index Ra	>80

### Dimensions

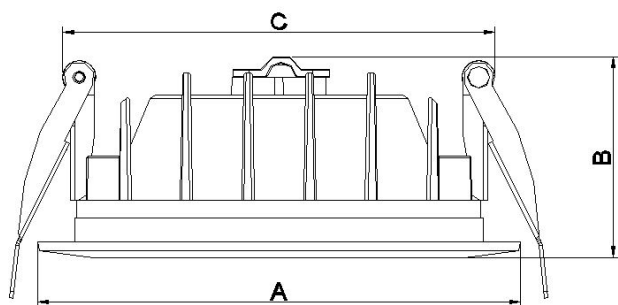

A	195 mm
B	61 mm
C	163.5 mm

### Colors & materials

Body material	Aluminum die cast
Product color	Electrostatic powder paint



Note : Product body paint can be ordered with other RAL codes.

### Temperatures & operating conditions

Ambient temperature range	-25 ... +85 °C
---------------------------	----------------

**Light Technical Data**

<b>Beam angle</b>	Wide distribution
-------------------	-------------------

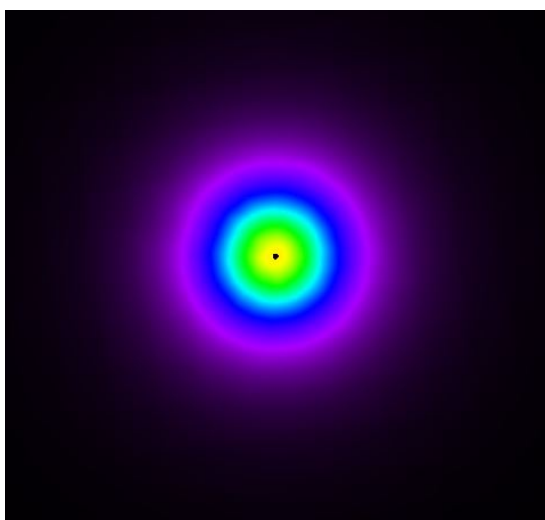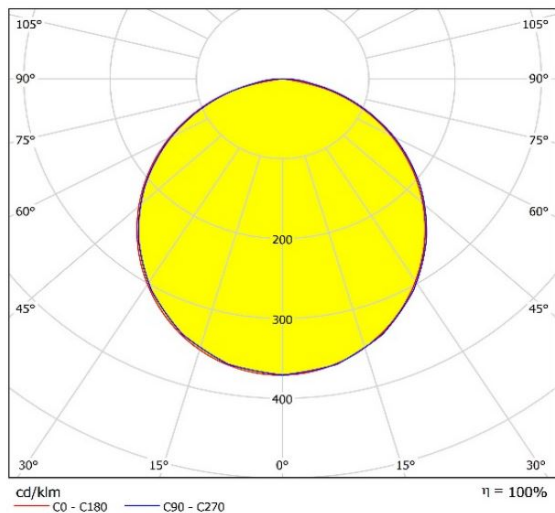

<b>Type of cover</b>	Opal arcyclic diffuser
----------------------	------------------------

**Capabilities**

<b>Type of installation</b>	Recessed
<b>Type of connection</b>	Cable, 2x 0.50mm <sup>2</sup>

**Certificates & standards**

<b>Protection class</b>	Insulation class I (safety insulation)
<b>Type of protection</b>	IP20