

## ECOSTREET-S

### STREET LIGHT



#### Areas of application

- Collection Roads
- Main Roads
- Logistic Areas
- Urban Areas
- Parks
- Open Carparks
- Airports

#### Product benefits

- Efficient energy saving
- Elegant design
- Easy installation system

#### Product specifications

- Lifetime (L70/B50) : up to 50,000 h
- Color temperature : 2,700 K - 6,500 K
- Operating voltage : 220...240 V AC supply
- Type of protection : IP67
- Pole mounting
- Led type : Samsung - Cree
- Driver : Meanwell



IP 67



# Product datasheet

## Technical data


### Electrical data

Nominal wattage	60 W
Nominal voltage	220 - 240 V
Power factor	> 0.9
Lumen / Watt	110 lm/watt
Total harmonic distortion	< %20
Mains frequency	50...60 Hz

### Photometrical data

Color temperature	2700 K - 6500 K
Luminous flux	6624 lm
Color rendering index Ra	> 80

### Dimensions

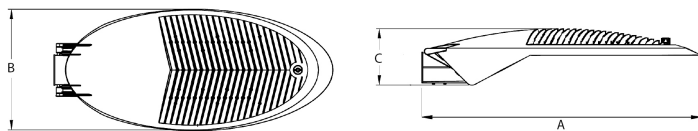

A	474 mm
B	238 mm
C	100 mm

### Colors & materials

Body material	Aluminum die cast
Product color	Electrostatic powder paint

Note : Product body paint can be ordered with other RAL codes.



### Temperatures & operating conditions

Ambient temperature range	-25 ... +85 °C
---------------------------	----------------

# Product datasheet

## Light Technical Data

<b>Beam angle</b>	Asymmetric distributon
-------------------	------------------------

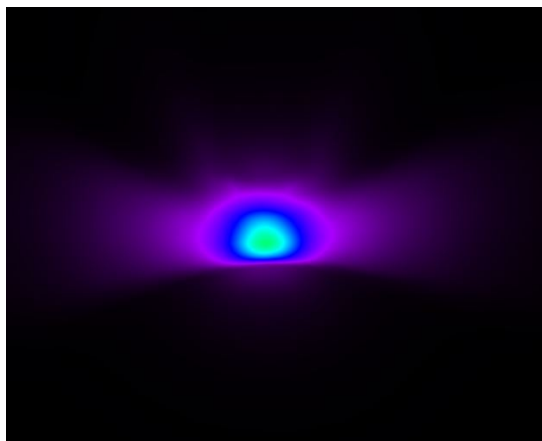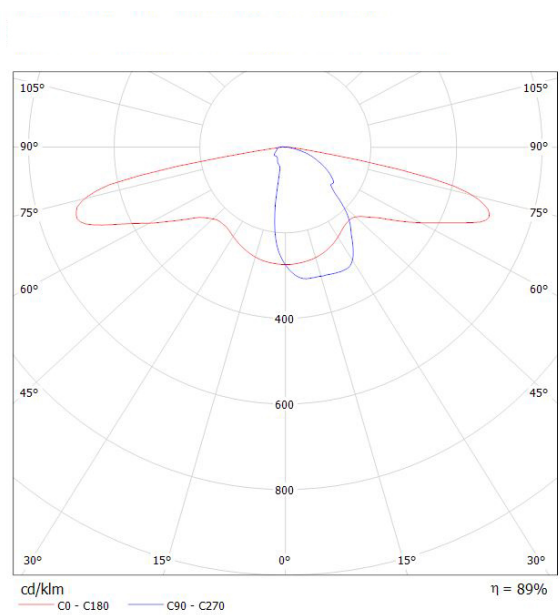

<b>Type of cover</b>	Tempered glass
----------------------	----------------

### Capabilities

<b>Type of installation</b>	With lighting pole
<b>Type of connection</b>	Cable, 3 x 1.50 mm <sup>2</sup>

### Certificates & standards

<b>Protection class</b>	Insulation class I (safety insulation)
<b>Type of protection</b>	IP67

## ECOSTREET-M

### STREET LIGHT



#### Areas of application

- Collection Roads
- Main Roads
- Logistic Areas
- Urban Areas
- Parks
- Open Carparks
- Airports

#### Product benefits

- Efficient energy saving
- Elegant design
- Easy installation system

#### Product specifications

- Lifetime (L70/B50) : up to 50,000 h
- Color temperature : 2,700 K - 6,500 K
- Operating voltage : 220...240 V AC supply
- Type of protection : IP67
- Pole mounting
- Led type : Samsung - Cree
- Driver : Meanwell



IP 67



# Product datasheet

## Technical data


### Electrical data

Nominal wattage	110 W
Nominal voltage	220 - 240 V
Power factor	> 0.9
Lumen / Watt	120 lm/watt
Total harmonic distortion	< %20
Mains frequency	50...60 Hz

### Photometrical data

Color temperature	2700 K - 6500 K
Luminous flux	13248 lm
Color rendering index Ra	> 80

### Dimensions

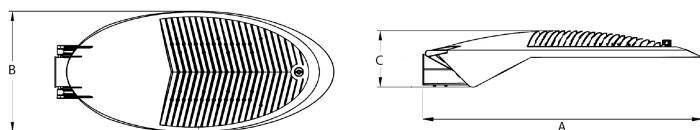

A	644 mm
B	302 mm
C	132 mm

### Colors & materials

Body material	Aluminum die cast
Product color	Electrostatic powder paint

Note : Product body paint can be ordered with other RAL codes.



### Temperatures & operating conditions

Ambient temperature range	-25 ... +85 °C
---------------------------	----------------

## Product datasheet

### Light Technical Data

Beam angle	Asymmetric distributon
------------	------------------------

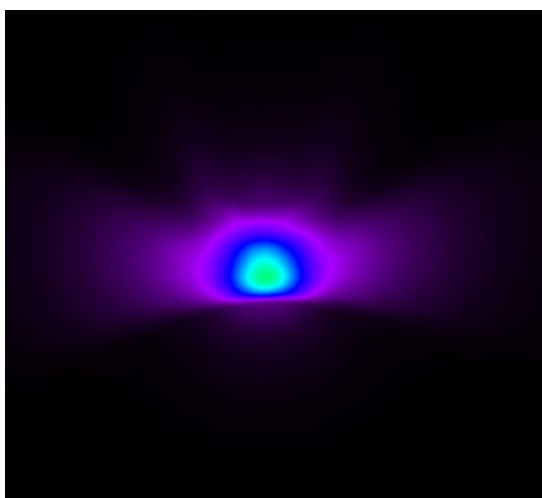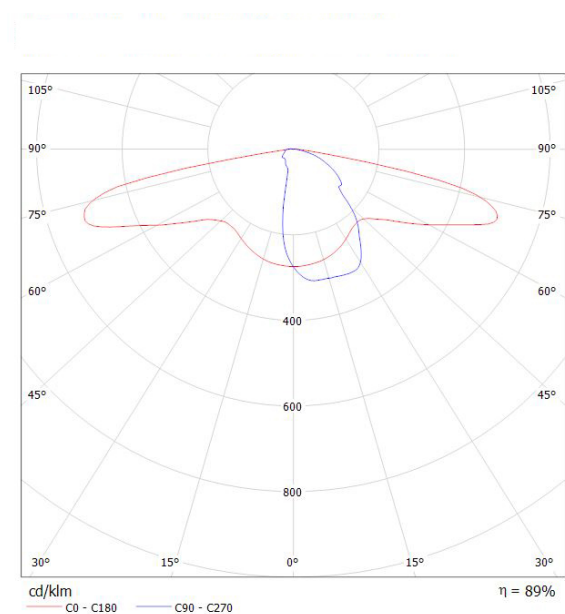

Type of cover	Tempered glass
---------------	----------------

### Capabilities

Type of installation	With lighting pole
Type of connection	Cable, 3 x 1.50 mm <sup>2</sup>

### Certificates & standards

Protection class	Insulation class I (safety insulation)
Type of protection	IP67

## ECOSTREET-L

### STREET LIGHT



#### Areas of application

- Collection Roads
- Main Roads
- Logistic Areas
- Urban Areas
- Parks
- Open Carparks
- Airports

#### Product benefits

- Efficient energy saving
- Elegant design
- Easy installation system

#### Product specifications

- Lifetime (L70/B50) : up to 50,000 h
- Color temperature : 2,700 K - 6,500 K
- Operating voltage : 220...240 V AC supply
- Type of protection : IP67
- Pole mounting
- Led type : Samsung - Cree
- Driver : Meanwell



IP 67



# Product datasheet

## Technical data


### Electrical data

Nominal wattage	140 W
Nominal voltage	220 - 240 V
Power factor	> 0.9
Lumen / Watt	128 lm/watt
Total harmonic distortion	< %20
Mains frequency	50...60 Hz

### Photometrical data

Color temperature	2700 K - 6500 K
Luminous flux	17856 lm
Color rendering index Ra	> 80

### Dimensions

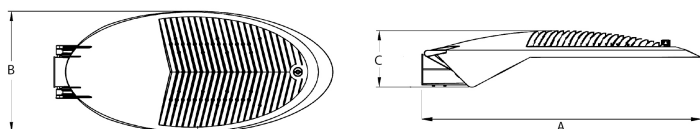

A	864 mm
B	375 mm
C	168 mm

### Colors & materials

Body material	Aluminum die cast
Product color	Electrostatic powder paint

Note : Product body paint can be ordered with other RAL codes.

### Temperatures & operating conditions



Ambient temperature range	-25 ... +85 °C
---------------------------	----------------



## Product datasheet

### Light Technical Data

Beam angle	Asymmetric distribiton
------------	------------------------

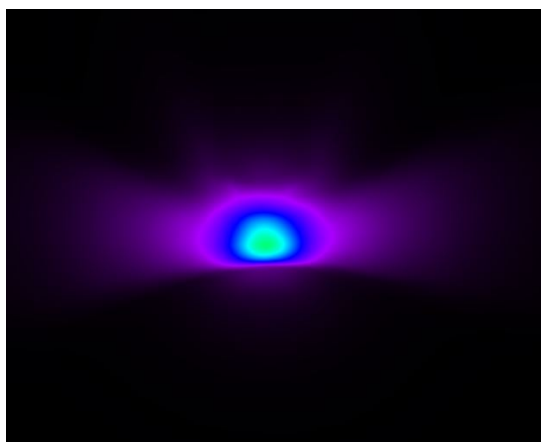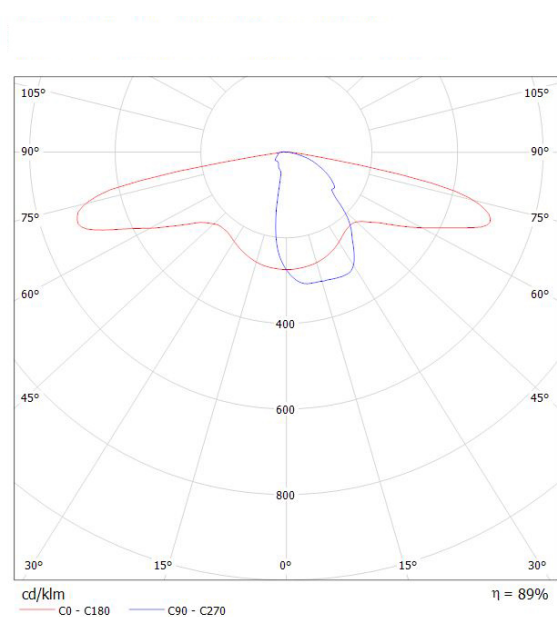

Type of cover	Tempered glass
---------------	----------------

### Capabilities

Type of installation	With lighting pole
Type of connection	Cable, 3 x 1.50 mm <sup>2</sup>

### Certificates & standards

Protection class	Insulation class I (safety insulation)
Type of protection	IP67